


## Zūm™ Wireless



### IECC 2015 Code Compliance:

- ▶ Manual Controls (C405.2.1.1.3)
- ▶ Manual On/Partial On (Vacancy Sensing Mode) (C405.2.1.1.2)
- ▶ Automatic Full Off (C405.2.1.1.1)
- ▶ Bi-level Control (0-10V Dimming) (C405.2.3.1.4)
- ▶ Daylight-responsive Controls (Photocontrols) (C405.2.3)

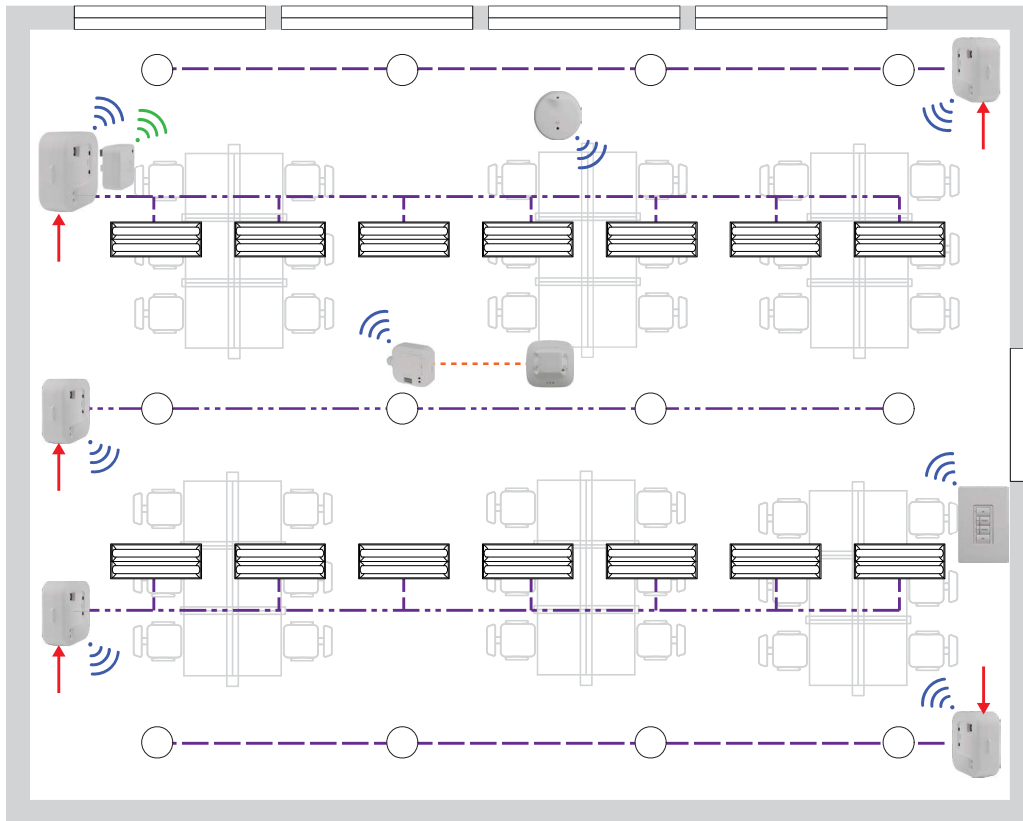

Symbol	Product	Qty.	Description
	GLA-DT-QUATTRO-COM1-24	1	Dual Technology Presence Detector, Ceiling Mount, Square & Scalable 360° Coverage, 18-24 VAC/VDC
	ZUMMESH-JBOX-5A-LV	5	Junction Box Zone Controller, 0-10V Dimming, 5A
	ZUMMESH-KP10CBATT	1	6-Button Battery Powered Keypad
	ZUMMESH-NETBRIDGE	1	Zūm™ Network Bridge
	ZUMMESH-JBOX-SIM	1	Zūm™ Junction Box Sensor Integration Module
	ZUMMESH-OL-PHOTOCELL	1	Open Loop Daylight Sensor