


Zūm™ Wireless

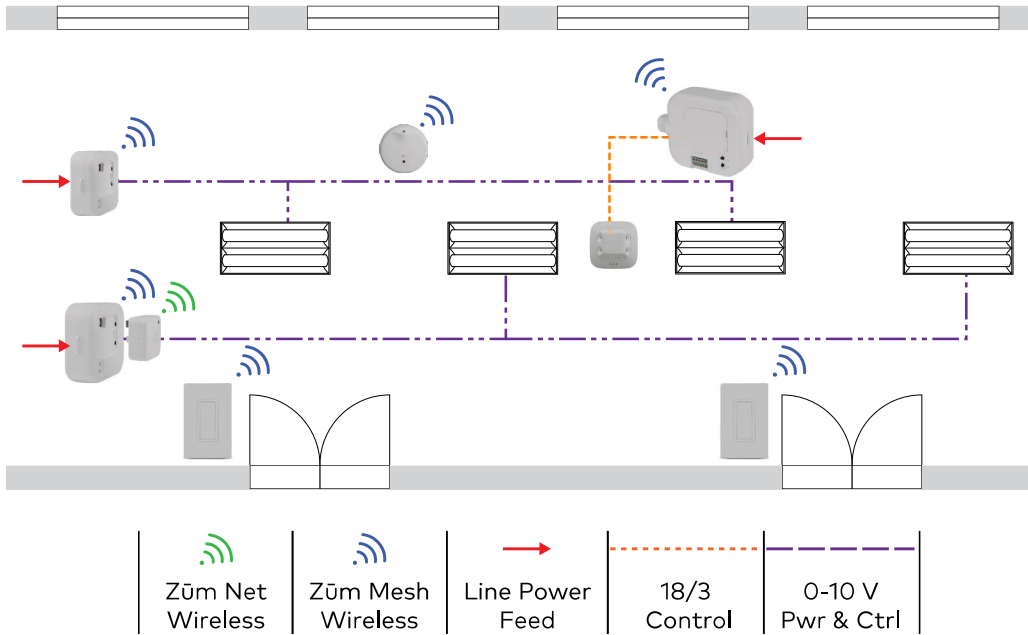

IECC 2015 Code Compliance:

- ▶ Manual Controls (C405.2.1.1.3)
- ▶ Automatic Full On (Occupancy Sensing Mode) (C405.2.1.1.2)
- ▶ Automatic Full Off (C405.2.1.1.1)
- ▶ Bi-level Control (0-10V Dimming) (C405.2.3.1.4)
- ▶ Daylight-responsive Controls (Photocontrols) (C405.2.3)

NOTE: UL924 emergency lighting devices are available for life safety.

Symbol	Product	Qty.	Description
	ZUMMESH-JBOX-SIM	1	Zūm™ Junction Box Sensor Integration Module
	GLA-US-HALLWAY-COM1-24	1	40 kHz Ultrasonic Presence Detector, Ceiling Mount, Hallway Coverage, 18-24 VAC/VDC
	ZUMMESH-JBOX-5A-LV	2	Junction Box Zone Controller, 0-10V Dimming, 5A
	ZUMMESH-NETBRIDGE	1	Zūm™ Network Bridge
	ZUMMESH-KP10ABATT	2	Rocker-Button Battery Powered Keypad
	ZUMMESH-OL-PHOTOCELL	1	Open Loop Daylight Sensor